
## **MODEL DB32**



= 4 ft - 8 3/8 in; L1 = 5 ft - 11 in = 2 ft - 8 3/8 in; W1 = 4 ft - 6 in

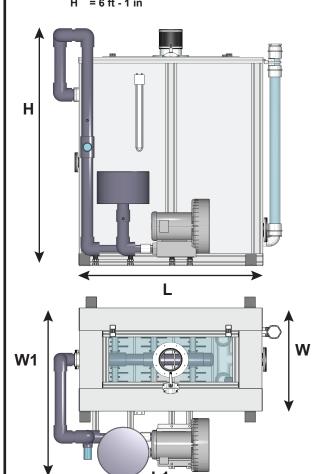

## DEEPBUBBLE **Multi-Stage Air Stripper**

- HDPE VESSEL & MODULAR ALUMINUM FRAME
- INSULATED NO-SWEAT TANK
- **HIGH-EFFICIENCY**
- LOW MAINTENANCE

Number of Stages Max Flow, gpm Max Air, scfm Inlet & Outlet Size


150 200

2" to 6" exp flange

Empty (shipping) Weight, lb Operating Weight, Ib Blower & Filter, lb 525 (vessel only) 1,950 (vessel operating)

150

NOTE: specifications subject to change without notice



Maximum water flow allowed is determined by the Air:Water Ratio required for treatment goal

Designs & Quotations CALĽ 800 - 434 - 9080

www.lowryh2o.com

DEEPBUBBLE Multi-Stage Aeration Systems are furnished complete with blower, filter/silencer, and accessories with Lowry Aeration Systems' guarantee of performance. Optional control panels and booster pumps available.