

MODEL DB63






DEEPBUBBLE™ Multi-Stage Air Stripper

- HDPE VESSEL & MODULAR ALUMINUM FRAME
- INSULATED NO-SWEAT TANK
- HIGH-EFFICIENCY
- LOW MAINTENANCE

Number of Stages	6
Max Flow, gpm	500
Max Air, scfm	600
Inlet & Outlet Size	2" to 8" exp flange
Vent	2" to 12"
Empty (shipping) Weight, lb	1,185 (vessel only)
Operating Weight, lb	5,675 (vessel operating)
Blower & Filter, lb	600

NOTE: specifications subject to change without notice

L = 9 ft - 8 3/8 in; L1 = 11 ft - 2 in
W = 6 ft - 6 in; W1 = 3 ft - 8 3/8 in
H = 7 ft - 4 in

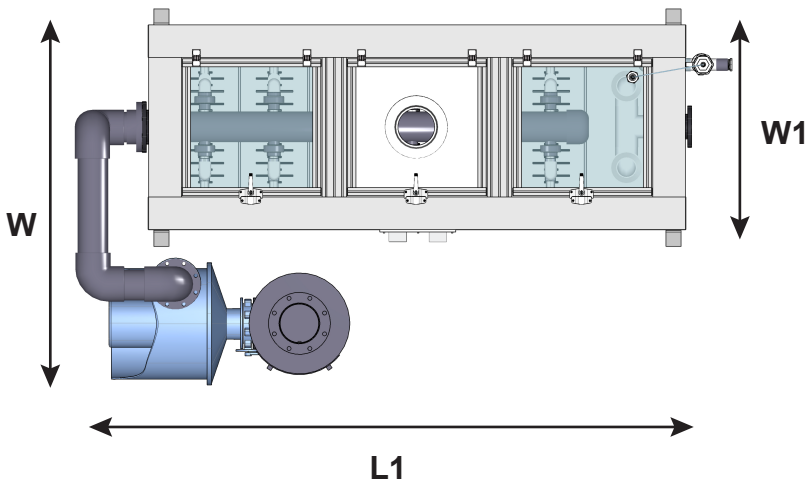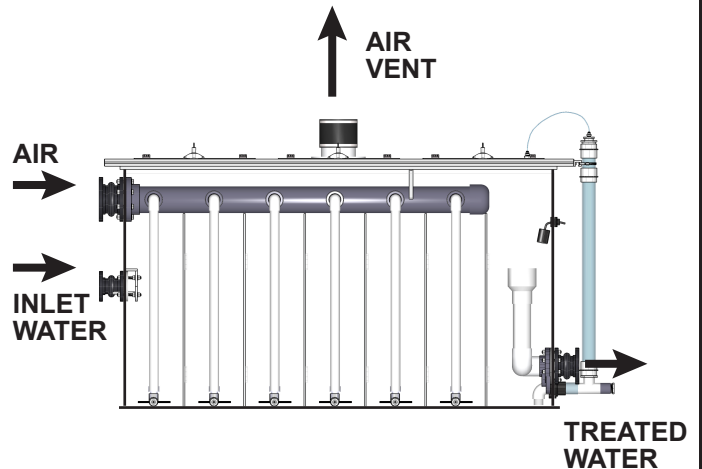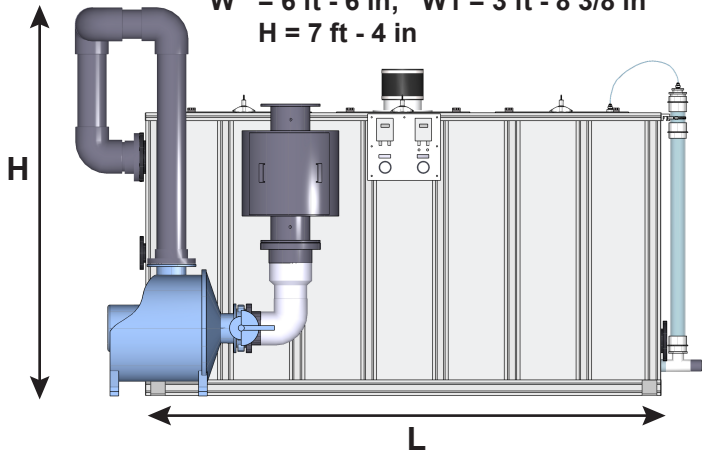

Maximum water flow allowed is determined by the Air:Water Ratio required for treatment goal

**Designs & Quotations
CALL 800 - 434 - 9080**

www.lowryh2o.com

DEEPBUBBLE Multi-Stage Aeration Systems are furnished complete with blower, filter/silencer, and accessories with Lowry Aeration Systems' guarantee of performance. Optional control panels and booster pumps available.