


Stainless Steel DEEPBUBBLE™ Multi-Stage Aeration

- PACKAGED SYSTEM WITH BOOSTER PUMP AND CONTROLS
- HIGH-EFFICIENCY DEEP STAGES
- LOW MAINTENANCE
- INSULATED NO-SWEAT TANK

*MODEL DB-62P shown
blower and booster
pump vary with
specific application*

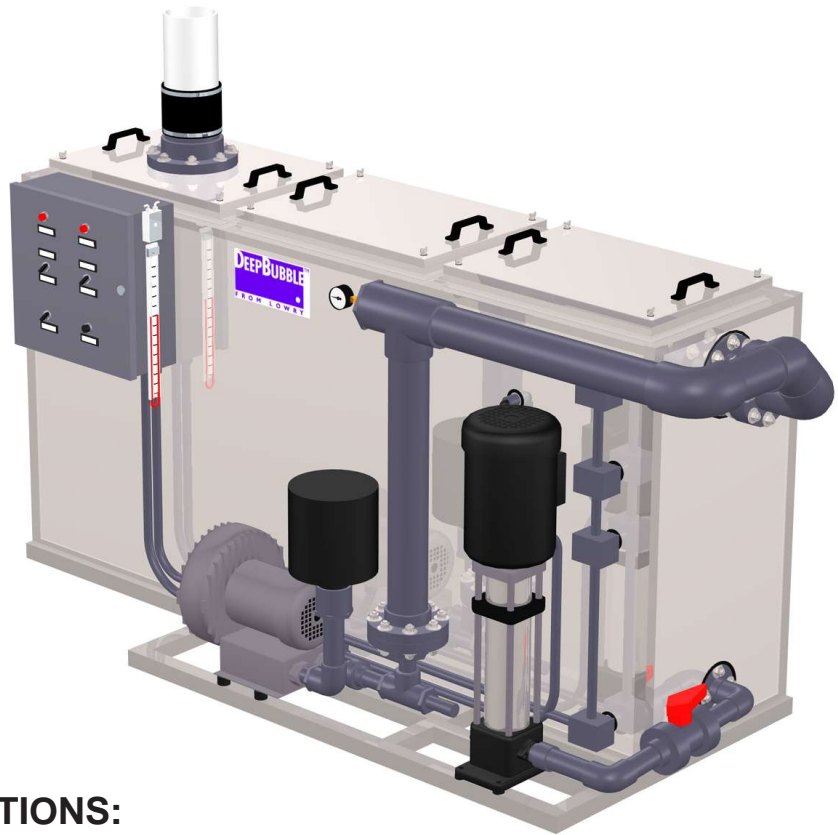

SPECIFICATIONS:

	DB32P	DB62P	DB63P	DB84P
Number of Stages	3	6	6	8
Max Flow, gpm (approx.)	50	150	300	600
Max Air, cfm	varies with aerator type and application			
Dimensions:				
Length (approx.-varies)	4'-6"	9'-6"	9'-6"	13'-6"
Width (approx.-varies)	4'-0"	4'-0"	5'-0"	6'-0"
Height	3'-6"	5'-2"	5'-2"	6'-2"
Inlets/Outlets	standard Sch 80 or SS flanges or couplers			
Vessel Material	304 SS or 316 SS (optional)			
Aerators	Type I PVC in interchangeable orifice sizes			

NOTE: specifications subject to change without notice

DEEPBUBBLE Multi-Stage Aeration Systems are furnished complete with blower(s), filter silencer(s), and accessories with Lowry Aeration Systems' guarantee of performance. Packaged systems are skid-mounted and include a control panel, all switches, and a booster pump.

LOWRY
AERATION SYSTEMS

146 South Street
Blue Hill, ME 04614

*Designs & Quotations
CALL 800 - 434 - 9080*